



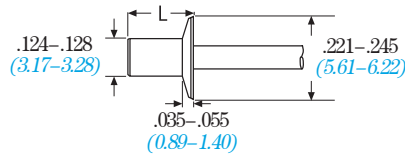
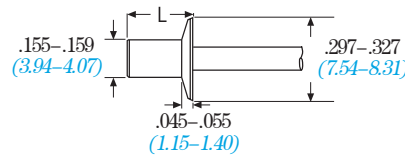
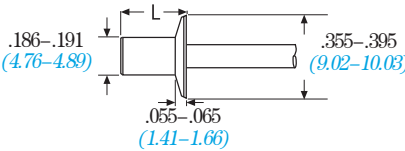




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉 直径	(L) 铆体 长度	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
5056 铝体钢轴-120° 沉头 -表面处理: 本色处理/保护镀层							
1/8 (3.2)	.277 (7.0)	.031-.062 (.8-1.6)	AK 41 H	.129-.133 (3.28-3.38)		305 (1358)	385 (1712)
	.341 (8.7)	.063-.125 (1.6-3.2)	AK 42 H				
	.402 (10.2)	.126-.250 (3.2-6.4)	AK 43 H				
	.466 (11.8)	.188-.250 (6.4-7.9)	AK 44 H				
	.528 (13.4)	.251-.312 (7.9-9.5)	AK 45 H				
	.591 (15.0)	.313-.375 (9.5-12.7)	AK 46 H				
5/32 (4.0)	.307 (7.8)	.032-.062 (1.6-3.2)	AK 51 H	.160-.164 (4.06-4.17)		430 (1913)	605 (2691)
	.370 (9.4)	.063-.125 (3.2-4.8)	AK 52 H				
	.432 (11.0)	.126-.187 (4.8-6.4)	AK 53 H				
	.475 (12.6)	.251-.312 (6.4-7.9)	AK 55 H				
	.558 (14.2)	.313-.375 (7.9-9.5)	AK 56 H				
3/16 (4.8)	.395 (10.0)	.063-.125 (1.6-3.2)	AK 62 H	.192-.196 (4.88-4.98)		575 (2558)	840 (3736)
	.520 (13.2)	.126-.250 (3.2-6.4)	AK 64 H				
	.645 (16.4)	.251-.375 (6.4-9.5)	AK 66 H				

POP® 牌铆钉在设备和机器领域内的应用