



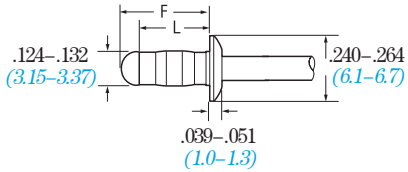
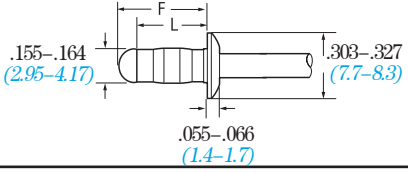
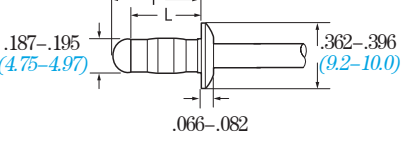




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉 直径	(L) 铆体 长度	(F) 盲端 突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
不锈钢体/不锈钢轴 – 圆头–表面处理：本色处理/本色处理								
1/8 (3.2)	.315 (8.0)	.441 (11.2)	.063-.126 (1.6-3.2)	SSD 42 SSHR	.134-.142 (3.4-3.6)		427 (1900)	562 (2500)
	.378 (9.6)	.503 (12.8)	.126-.189 (3.2-4.8)	SSD 43 SSHR				
	.441 (11.2)	.567 (14.4)	.189-.252 (4.8-6.4)	SSD 44 SSHR				
5/32 (4.0)	.354 (9.0)	.492 (12.5)	.063-.126 (1.6-3.2)	SSD 52 SSHR	.165-.173 (4.2-4.4)		630 (2800)	855 (3800)
	.417 (10.6)	.555 (14.1)	.126-.189 (3.2-4.8)	SSD 53 SSHR				
	.480 (12.2)	.618 (15.7)	.189-.252 (4.8-6.4)	SSD 54 SSHR				
3/16 (4.8)	.362 (9.2)	.545 (13.9)	.063-.125 (1.6-3.2)	SSD 62 SSHR	.196-.212 (5.0-5.4)		1056 (4700)	1124 (5000)
	.425 (10.8)	.610 (15.5)	.125-.187 (3.2-4.8)	SSD 63 SSHR				
	.488 (12.8)	.673 (17.1)	.187-.250 (4.8-6.4)	SSD 64 SSHR				