



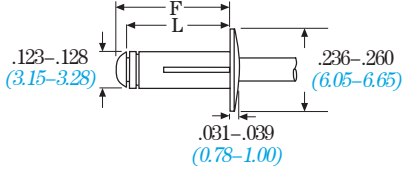
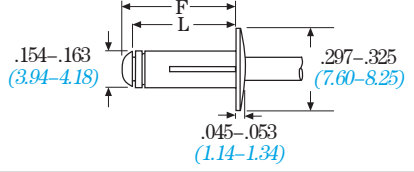
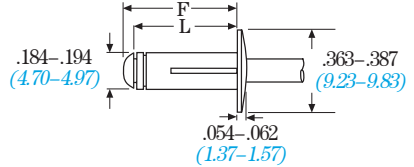




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉直径	(L) 铆体长度	(F) 盲端突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
5154 铝体铝芯轴-圆头-表面处理: 本色处理/本色处理								
1/8 (3.2)	.664 (16.9)	.755 (19.2)	0-.250 (0-6.4)	ACD 408 AS	.129-.133 (3.28-3.38)		124 (550)	202 (900)
5/32 (4.0)	.689 (17.5)	.780 (19.8)	0-.250 (0-6.4)	ACD 508 ASM	.165-.169 (4.19-4.30)		202 (900)	292 (1300)
	.838 (21.3)	.929 (23.6)	.118-.375 (3.0-9.5)	ACD 512 ASM				
	.984 (25.0)	1.071 (27.2)	.197-.472 (5.0-12.0)	ACD 516 ASM				
3/16 (4.8)	.689 (17.5)	.800 (20.3)	0-.250 (0-6.4)	ACD 608 ASM	.197-.205 (5.00-5.21)		225 (1000)	312 (1400)
	.795 (19.8)	.890 (22.6)	.118-.375 (3.0-9.5)	ACD 612 ASM				
	.925 (23.5)	1.040 (26.4)	.197-.472 (5.0-12.0)	ACD 616 ASM				