




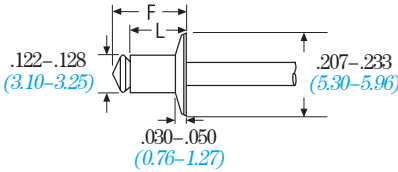
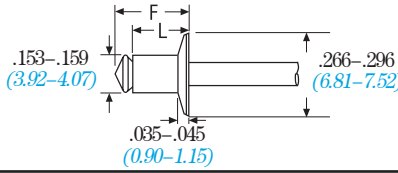


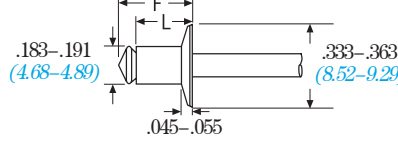

安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉直径	(L) 铆体长度	(F) 盲端突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
5056 铝体/钢轴-120° 沉头 -表面处理: 本色处理/保护镀层								
1/8 (3.2)	.250 (6.5)	.370 (9.4)	.063-.125 (1.6-3.2)	AK 42 BS	.129-.133 (3.30-3.40)		210 (934)	325 (1445)
	.313 (8.0)	.433 (11.0)	.126-.187 (3.2-4.8)	AK 43 BS				
	.375 (9.5)	.495 (12.6)	.188-.250 (4.8-6.4)	AK 44 BS				
	.438 (11.1)	.558 (14.2)	.251-.312 (6.4-7.9)	AK 45 BS				
	.500 (12.7)	.620 (15.7)	.313-.375 (7.9-9.5)	AK 46 BS				
	.625 (15.9)	.745 (18.9)	.376-.500 (9.5-12.7)	AK 48 BS				
5/32 (4.0)	.275 (7.0)	.415 (10.5)	.063-.125 (1.6-3.2)	AK 52 BS	.160-.164 (4.06-4.17)		340 (1512)	490 (2179)
	.400 (10.2)	.540 (13.7)	.188-.250 (4.8-6.4)	AK 54 BS				
	.52 (13.3)	.665 (16.9)	.313-.375 (7.9-9.5)	AK 56 BS				
3/16 (4.8)	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	AK 64 BS	.192-.196 (4.88-4.98)		445 (1979)	720 (3202)
	.550 (14.0)	.710 (18.0)	.251-.375 (6.4-9.5)	AK 66 BS				