




安装信息请参考我们的工具选
型及我们网站上 www.rivettech.cn
安装工具与系统栏目。

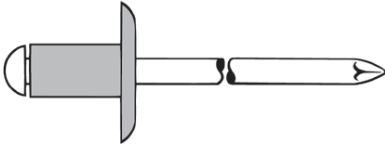

铆体: 铝 AlMg3
钉芯: A2 不锈钢 — 号码 1.4541

	铆体 D, x L mm	铆接范围 mm	编号	每盒数量
5 - K 11 孔径 Ø: 5,1 mm Ü	5 x 8	2,5 - 4,5	632 3928	B 500
	5 x 10	4,5 - 6,0	632 3936	"
	5 x 12	6,0 - 8,0	632 3944	"
	5 x 14	8,0 - 10,0	632 3847	"
	5 x 16	10,0 - 12,0	632 3952	"
	5 x 18	12,0 - 14,0	632 3855	B 250
	5 x 20	14,0 - 15,0	632 3987	"
	5 x 25	15,0 - 20,0	632 4002	"
	5 x 30	20,0 - 25,0	632 4029	B 100

	铆体 D, x L mm	铆接范围 mm	编号	每盒数量
5 - K 14 孔径 Ø: 5,1 mm Ü	5 x 8	2,5 - 4,5	632 4037	B 250
	5 x 10	4,5 - 6,0	632 4045	"
	5 x 12	6,0 - 8,0	632 4053	"
	5 x 14	8,0 - 10,0	632 4150	"
	5 x 16	10,0 - 12,0	632 4061	"
	5 x 18	12,0 - 14,0	632 4169	"
	5 x 20	14,0 - 15,0	632 4096	"
	5 x 25	15,0 - 20,0	632 4118	"
	5 x 30	20,0 - 25,0	632 4134	B 100

Ü: DIBt 文献号 Z-14.1-4
详情请参看文献

材料附加的费用会随时更新

适用于第 6 页和第 7 页的铆钉:

铆钉直径 Ø mm	N	抗剪力 (kp)	N	抗拉力 (kp)	钉芯直径 Ø mm	最大帽檐 Ø 铝 / 钢 mm	最大帽檐 Ø 铝/不锈钢 mm
3	700	(71)	900	(91)	1,8	6,0	6,5
4	1.400	(143)	2.000	(204)	2,1	7,5	8,0
5	2.000	(204)	2.800	(285)	2,7	9,0	9,5
3,2 K 9,5 仅限铝/钢	720	(73)	950	(97)	1,95	9,5	
4 K 12 仅限铝/钢	1.400	(143)	2.000	(204)	2,1	12,0	
4,8 K 16 仅限铝/钢	1.800	(184)	2.700	(275)	2,7	16,0	
5 K 11	2.000	(204)	2.800	(285)	2,7	11,0	11,0
5 K 14	2.000	(204)	2.800	(285)	2,7	14,0	14,0

测试过程按照 DIN EN ISO 14589 标准

色彩图例



铝



钢



铜



A2 不锈钢



蒙乃尔



塑料



A4 不锈钢

作为德国GESIPA® 中国区重要合作伙伴，我们愿携手GESIPA® 公司共同为中国区客户提供高质量铆接解决方案。