




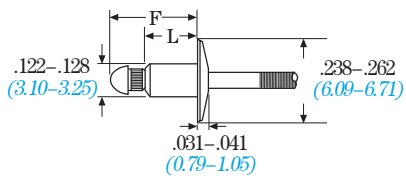
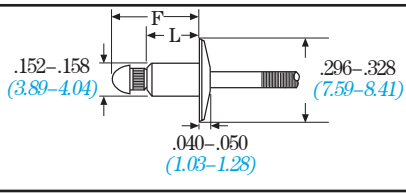
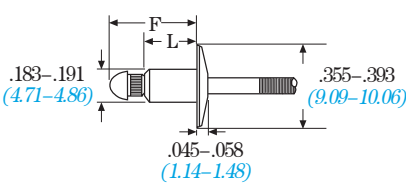


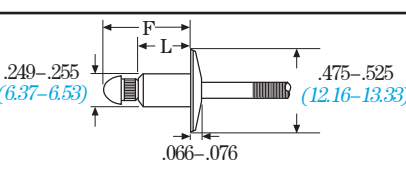

安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉直径	(L) 铆钉长度	(F) 盲端突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
C1006-C1010 钢体钢轴 - 圆头-表面处理: 镀锌镀锌								
1/8 (3.2)	.250 (6.4)	.452 (11.5)	.063-.125 (1.6-3.1)	SD 42 SP:093	.129-.133 (3.30-3.40)		450 (2001)	350 (1556)
	.329 (8.4)	.528 (13.4)	.150-.195 (3.8-4.9)	SD 43 SP:165				
	.391 (19.93)	.590 (15.0)	.185-.240 (4.6-6.0)	SD 44 SP:185				
	.507 (12.9)	.706 (17.9)	.312-.360 (7.9-9.1)	SD 46 SP:312				
5/32 (4.0)	.437 (11.1)	.669 (17.0)	.205-.260 (5.2-6.6)	SD 55 SP:218	.160-.164 (4.06-4.17)		525 (2335)	500 (2224)
	.562 (14.3)	.794 (20.2)	.241-.368 (6.1-9.3)	SD 56 SP:241				
3/16 (4.8)	.315 (8.0)	.612 (13.8)	.062-.125 (1.5-3.1)	SD 62 SP:093	.192-.196 (4.88-4.98)		900 (4005)	700 (3113)
	.378 (9.6)	.668 (17.0)	.065-.187 (1.6-4.7)	SD 63 SP:130				
	.425 (10.8)	.693 (17.6)	.126-.250 (3.2-6.4)	ESD 64 SP:187*				
	.440 (11.2)	.702 (17.8)	.181-.272 (4.6-6.9)	SD 64 SP:220				
	.700 (17.7)	.950 (24.1)	.376-.500 (9.6-12.7)	SD 68 SP:437				
1/4 (6.4)	.365 (9.3)	.650 (16.5)	.062-.125 (1.5-3.1)	SD 82 SP:093	.257-.261 (6.53-6.63)		1750 (7788)	1400 (6227)