




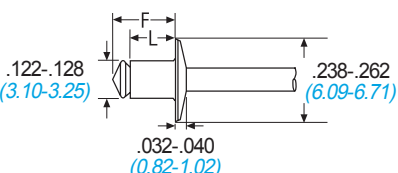
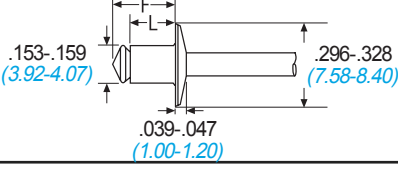


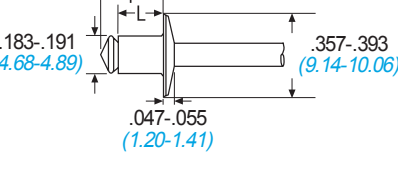

安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉直径	(L) 铆体长度	(F) 盲端突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
300 系列不锈钢体/不锈钢轴-圆头-表面处理：本色处理/防护涂层								
1/8 (3.2)	.188 (4.8)	.308 (7.8)	.032-.062 (.8-1.6)	SSD 41 BS	.129-.133 (3.30-3.40)		550 (2448)	700 (3115)
	.250 (6.4)	.370 (9.4)	.063-.125 (1.6-3.2)	SSD 42 BS				
	.313 (8.0)	.433 (11.0)	.126-.187 (3.2-4.8)	SSD 43 BS				
	.375 (9.5)	.495 (12.6)	.188-.250 (4.8-6.4)	SSD 44 BS				
	.438 (11.1)	.558 (14.2)	.251-.312 (6.4-7.9)	SSD 45 BS				
	.500 (12.7)	.620 (15.8)	.313-.375 (7.9-9.5)	SSD 46 BS				
	.625 (15.9)	.745 (18.9)	.376-.500 (9.5-12.7)	SSD 48 BS				
5/32 (4.0)	.275 (7.0)	.415 (10.5)	.063-.125 (1.6-3.2)	SSD 52 BS	.160-.164 (4.06-4.17)		900 (4005)	1130 (5029)
	.400 (10.2)	.540 (13.7)	.188-.250 (4.8-6.4)	SSD 54 BS				
	.525 (13.3)	.665 (16.9)	.251-.375 (6.4-9.5)	SSD 56 BS				
3/16 (4.8)	.300 (7.6)	.460 (11.7)	.063-.125 (1.6-3.2)	SSD 62 BS	.192-.196 (4.88-4.98)		1000 (4450)	1375 (6119)
	.425 (10.8)	.585 (14.9)	.126-.250 (3.2-6.4)	SSD 64 BS				
	.550 (14.0)	.710 (18.0)	.251-.375 (6.4-9.5)	SSD 66 BS				
	.675 (17.2)	.835 (21.2)	.376-.500 (9.5-12.7)	SSD 68 BS				
	.800 (20.3)	.960 (24.4)	.501-.625 (12.8-15.9)	SSD 610 BS				