




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

类型	材质	
90° 沉头	铝合金* (2.5% Mg) 自然	*: AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523

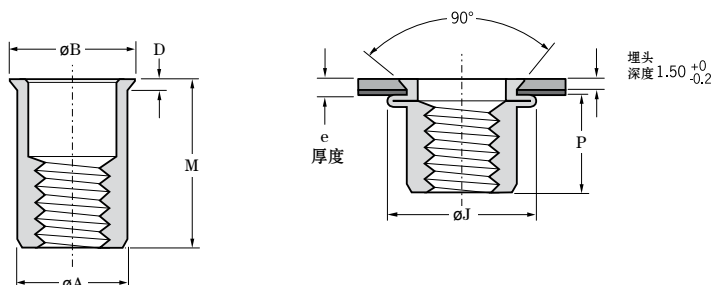

螺纹	e (厚度)		螺距 +0.1/-0	øA max.	øB +0/-0.4	D +0.3/-0.1	øJ max.	M ± 0.35	P max.	零件编号
	min.	max.								
M3 x 0.5	1.70	3.50	5.10	5.00	8.00	1.50	7.00	11.25	6.50	0FW96-00335
	1.70	3.50								
M4 x 0.7	3.50	5.00	6.10	6.00	9.00	1.50	8.10	11.50	6.80	0FW96-00435 0FW96-00450
	1.70	4.00								
M5 x 0.8	4.00	6.50	7.10	7.00	10.00	1.50	9.60	13.00	8.30	0FW96-00540 0FW96-00565
	1.70	4.50								
M6 x 1.0	4.50	6.50	9.10	9.00	12.00	1.50	12.10	17.00	10.00	0FW96-00645 0FW96-00665
	1.70	4.50								
M8 x 1.25	4.50	6.50	11.10	11.00	14.00	1.50	14.50	19.00	11.50	0FW96-00845 0FW96-00865
	1.70	4.50								
M10 x 1.5	4.50	6.50	12.50	12.40	15.40	1.50	16.50	21.00	14.70	0FW96-01045 0FW96-01065
	4.50	6.50								

螺纹	 推荐最大扭矩	 kN	 Nm min.	 kN
	Nm max.	kN	Nm min.	kN
M3 x 0.5	1.2	3.7	0.8	1.4
M4 x 0.7	4.0	4.7	1.7	1.9
M5 x 0.8	5.3	6.3	2.2	2.6
M6 x 1.0	10.8	10.1	4.7	3.4
M8 x 1.25	23.0	11.7	7.8	3.7
M10 x 1.5	28.0	13.8	9.9	4.7

所有尺寸均以毫米标注。