



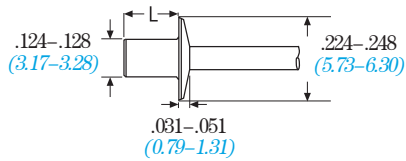
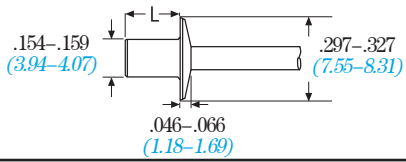
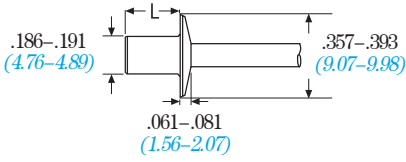




安装信息请参考我们的工具选型  
及我们网站上 [www.rivettech.cn](http://www.rivettech.cn) 安  
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求
- 可适用一定范围内的尺寸和材质。

铆钉 直径	(L) 铆体 长度	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
<b>1100 铝体铝芯轴-圆头-表面处理: 本色处理/本色处理</b>							
1/8 (3.2)	.237 (6.0)	.032-.062 (.8-1.6)	AD 41 AH	.129-.133 (3.28-3.38)		105 (467)	150 (667)
	.301 (7.7)	.063-.125 (1.6-3.2)	AD 42 AH				
	.362 (9.2)	.126-.187 (3.2-4.8)	AD 43 AH				
	.425 (10.8)	.188-.250 (4.8-6.4)	AD 44 AH				
5/32 (4.0)	.440 (11.2)	.188-.250 (4.8-6.4)	AD 54 AH	.160-.164 (4.06-4.17)		155 (689)	240 (1067)
	.502 (12.8)	.251-.312 (6.4-7.9)	AD 55 AH				
3/16 (4.8)	.330 (8.4)	.063-.125 (1.6-3.2)	AD 62 AH	.192-.196 (4.88-4.98)		220 (978)	310 (1378)
	.455 (11.6)	.126-.250 (3.2-6.4)	AD 64 AH				
	.580 (14.7)	.313-.375 (7.9-9.5)	AD 66 AH				
	.705 (17.9)	.376-.500 (9.5-12.7)	AD 68 AH				

## POP<sup>®</sup> 牌铆钉在设备和机器领域内的应用

