



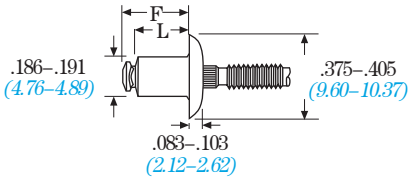
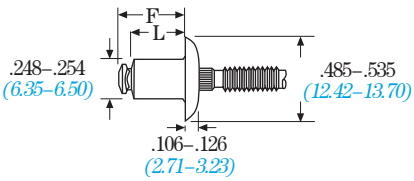




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求。
- 可适用一定范围内的尺寸和材质。

铆钉 直径	(L) 铆体 长度	(F) 盲端 突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
5056 铝体钢轴-圆头-表面处理: 本色处理镀锌								
3/16 (4.8)	.447 (11.4)	.565 (14.4)	.032-.140 (.8-3.6)	AD 6140 TFBS	.192-.196 (4.88-4.98)		950 (4228)	600 (2670)
	.510 (13.0)	.630 (16.0)	.141-.187 (3.6-4.8)	AD 6187 TFBS			1025 (4561)	
	.572 (14.5)	.690 (17.5)	.188-.250 (4.8-6.4)	AD 6250 TFBS			1050 (4670)	
	.635 (16.1)	.755 (19.2)	.251-.312 (6.4-7.9)	AD 6312 TFBS			1125 (5006)	
	.697 (17.7)	.820 (20.8)	.313-.375 (8.0-9.5)	AD 6375 TFBS			1200 (5340)	
	.760 (19.3)	.880 (22.4)	.376-.437 (9.5-11.1)	AD 6437 TFBS			1275 (5674)	
	.822 (20.9)	.940 (23.9)	.438-.519 (11.1-13.2)	AD 6519 TFBS			1350 (6008)	
1/4 (6.4)	.500 (12.7)	.625 (15.9)	.032-.140 (.8-3.6)	AD 8140 TFBS	.257-.261 (6.53-6.63)		1425 (6341)	1110 (4940)
	.552 (14.0)	.710 (18.0)	.141-.187 (3.6-4.8)	AD 8187 TFBS			1575 (7009)	
	.615 (15.6)	.775 (19.7)	.188-.250 (4.8-6.4)	AD 8250 TFBS			1650 (7343)	
	.677 (17.2)	.840 (21.3)	.251-.312 (6.4-7.9)	AD 8312 TFBS			1775 (7899)	
	.740 (18.8)	.900 (22.9)	.313-.375 (8.0-9.5)	AD 8375 TFBS			2050 (9123)	
	.802 (20.4)	.960 (24.4)	.376-.437 (9.5-11.1)	AD 8437 TFBS			2150 (9568)	
	.865 (22.0)	1.025 (26.0)	.437-.519 (11.1-13.2)	AD 8519 TFBS			2325 (10346)	
	.937 (23.8)	1.094 (27.8)	.520-.620 (13.2-15.8)	AD 8620 TFBS			2400 (10680)	