



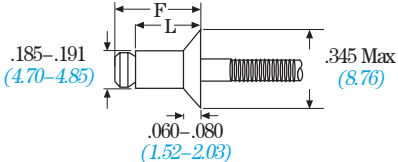
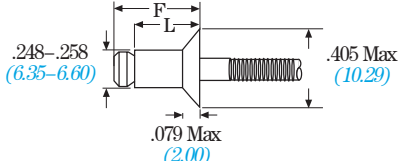
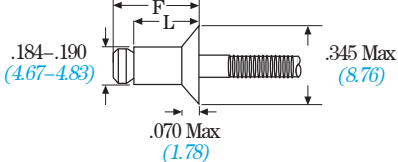
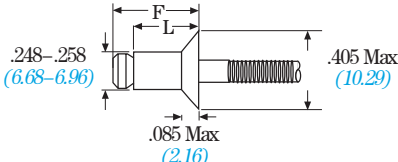




安装信息请参考我们的工具选型
及我们网站上 www.rivettech.cn 安
装工具与系统栏目。

- 坚固低成本紧固件。
- 是大范围应用的理想选择。
- 能应对通用紧固件的需求。
- 可适用一定范围内的尺寸和材质。

铆钉 直径	(L) 铆体 长度	(F) 盲端 突出	 夹紧厚度	铆钉零件编号	 孔大小	 抗剪力	 抗拉力	
In. (mm)	In. (mm)	In. (mm)	In. (mm)		In. (mm)	Lbs. (N)	Lbs. (N)	
C1006-C1010 钢体钢轴 - 100° 沉头-表面处理: 镀锌/镀锌								
3/16 (4.8)	.486 (12.3)	.795 (20.2)	.125-.331 (3.2-8.4)	SK 6331 UG	.191-.201 (4.85-5.10)		1450 (6452)	1200 (5340)
1/4 (6.4)	.660 (16.8)	1.059 (27.9)	.160-.475 (4.1-12.1)	SK 8475 UG	.261-.272 (6.63-6.91)		2500 (11125)	1850 (8233)
	.910 (23.1)	1.309 (33.2)	.415-.725 (10.5-18.4)	SK 8725 UG				
300 不锈钢体/不锈钢轴 - 100° 沉头-表面处理: 本色处理/本色处理								
3/16 (4.8)	.486 (12.3)	.762 (19.4)	.125-.331 (3.2-8.4)	SSK 6331 UG	.191-.201 (4.85-5.11)		1400 (6230)	1000 (4450)
1/4 (6.4)	.660 (16.8)	1.059 (27.9)	.160-.475 (4.1-12.1)	SSK 8475 UG	.261-.272 (6.63-6.91)		2500 (11125)	2000 (8900)